

HOT IN RUN, BULB TEST OR START

FUSE BLOCK

70 AMP

SOLID STATE

12V SPEED SIGNAL INPUT

12V PARK/NEUTRAL INPUT

5V OXYGEN SENSOR INPUT

5V REFERENCE POWER

5V THROTTLE POSITION INPUT

5V COOLANT TEMPERATURE INPUT

5V MANIFOLD AIR TEMPERATURE INPUT

INSTRUMENT PANEL (DIGITAL CLUSTER)

GEAR SELECTOR SWITCH

VEHICLE SPEED SENSOR BUFFER

OXYGEN SENSOR

THROTTLE POSITION SENSOR (TPS)


COOLANT TEMPERATURE SENSOR

MANIFOLD AIR TEMPERATURE SENSOR

ELECTRONIC CONTROL MODULE (ECM) SOLID STATE: DO NOT MEASURE RESISTANCE


MULTIPOINT FUEL INJECTION (TURBO VIN 7)

IGNITION

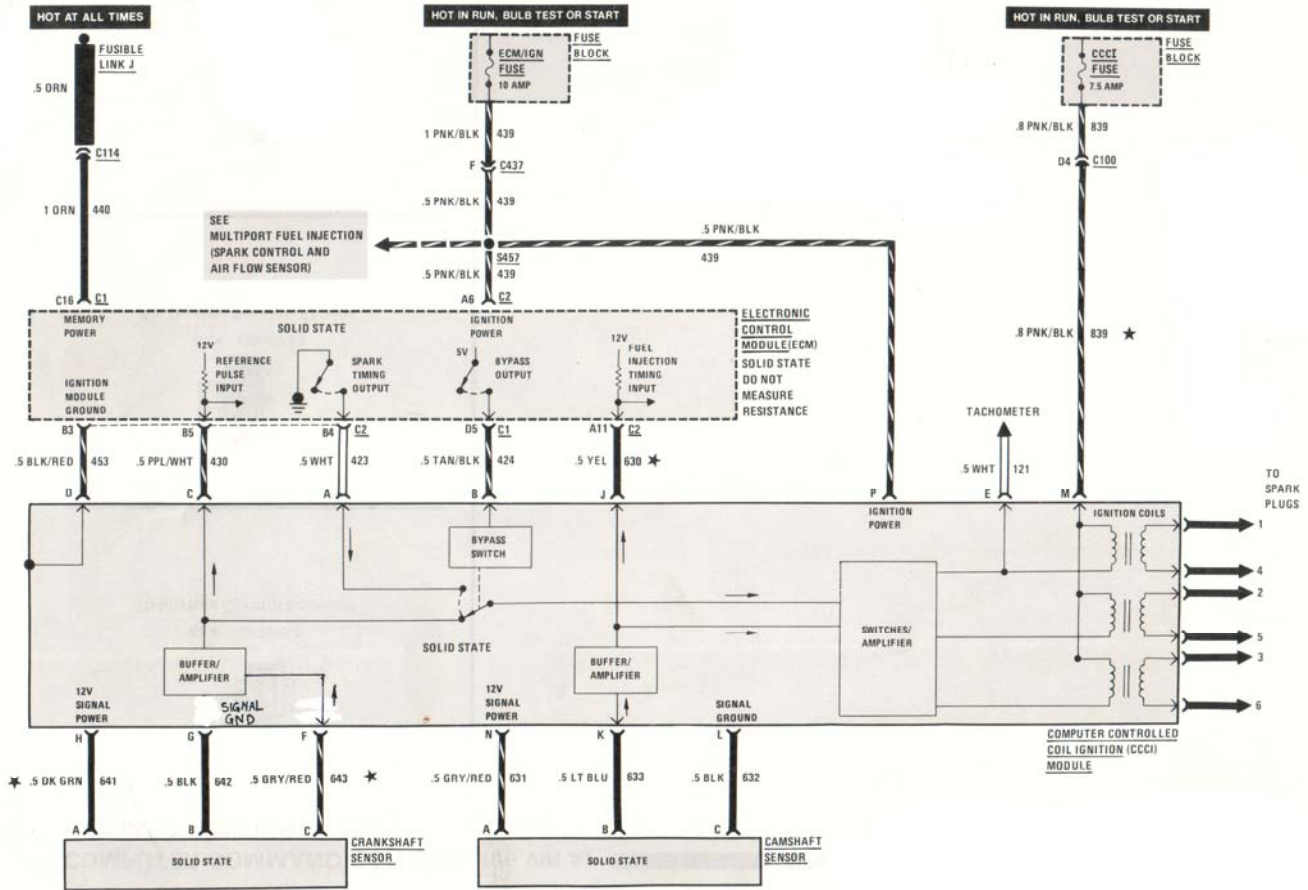

MULTIPOINT FUEL INJECTION (TURBO VIN 7)

FUEL CONTROL AND INJECTORS

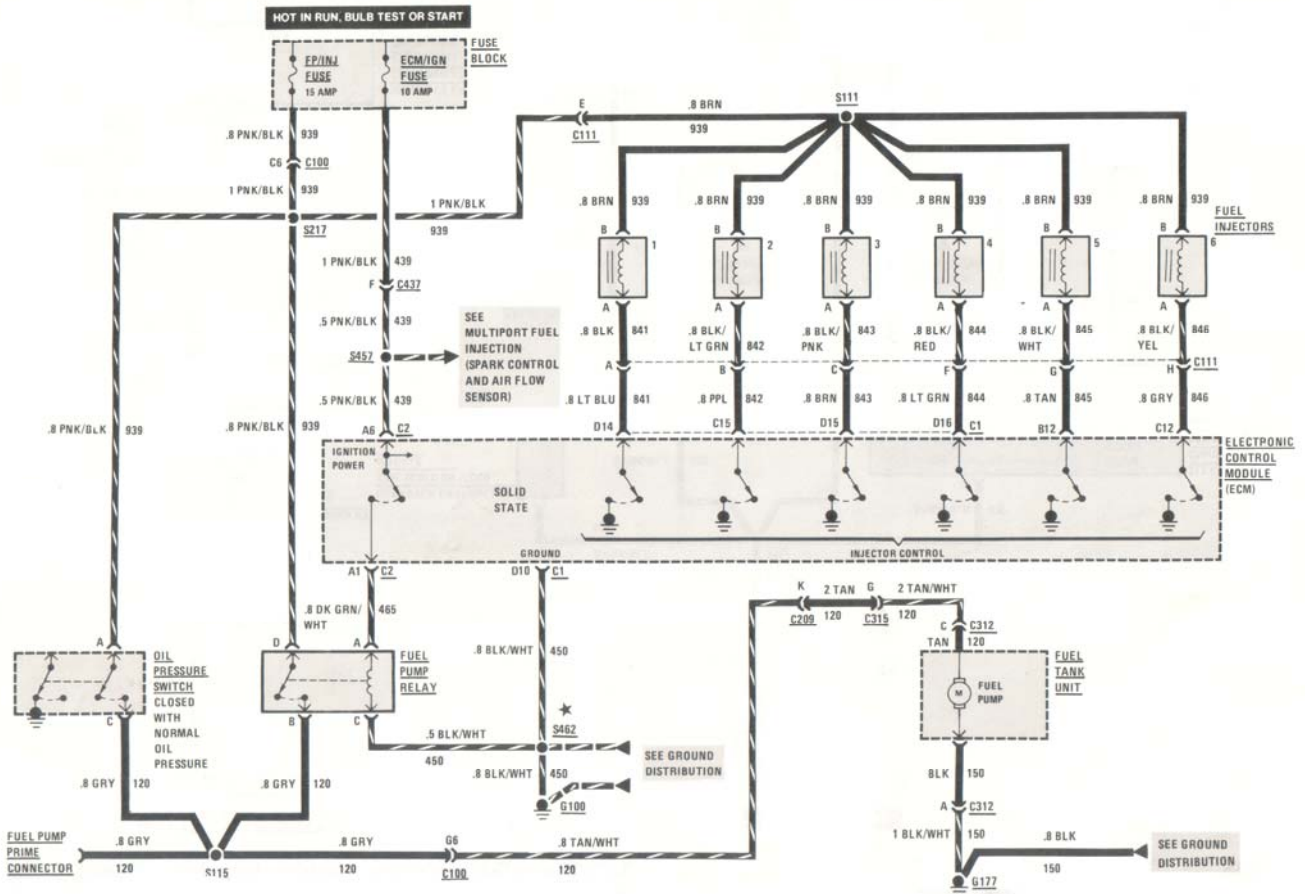

SPARK CONTROL, AIR FLOW SENSOR, AND CHECK ENGINE LIGHT

